




Ceiling Lights | 220-240 V | 1x2GX13
6857

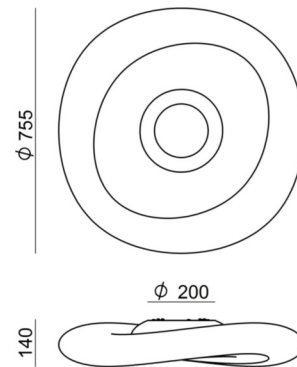

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 55 W
Lamp cap	1 x 2GX13
Frequency	50 - 60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating



Ceiling Lights | 220-240 V | 1x2GX13
6857

Double emission ceiling lights for indoor application. Fluorescent lamp included 55W, lamp cap 1x2GX13.

The diffuser is made of pe; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 4.805 kg. The power supply driver is included in the delivery.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	88 %
Luminous flux (source)	4200 lm
Luminaire luminous flux	3700 lm
Consumption	59 W
Luminaire efficacy	71 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	122°
Ottica C90/C270	116°

