

# PRODUCT FAMILY DATASHEET

## HALOLINE Standard

Double ended halogen lamps with tube base



---

### AREAS OF APPLICATION

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Brilliant accent light
- No transformer required
- Contains no mercury

---

### PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index  $R_a$ : 100
- Color temperature: 3,000 K
- Burning position: p15


TECHNICAL DATA

Product description	Electrical data				Photometrical data			Light technical data		Dimensions & weight	
	Nominal wattage	Nominal voltage	Rated wattage	Power factor $\lambda$	Color temperature	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Starting time	Warm-up time (60 %)	Diameter	Overall length
HALOLINE 750 W 230 V R7S <sup>1)</sup>	750.00 W	230 V	750.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	185.7 mm
HALOLINE 1000 W 230 V R7S <sup>1)</sup>	1000.00 W	230 V	1000.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	185.7 mm
HALOLINE 1000 W 240 V R7S <sup>1)</sup>	1000.00 W	240 V	1000.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	185.7 mm
HALOLINE 1500 W 230 V R7S <sup>1)</sup>	1500.00 W	230 V	1500.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	250.7 mm
HALOLINE 1500 W 240 V R7S <sup>1)</sup>	1500.00 W	240 V	1500.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	250.7 mm
HALOLINE 2000 W 230 V R7S <sup>1)</sup>	2000.00 W	230 V	2000.00 W	1.00	2900 K	100	0.80	0.0 s	0.00 s	12.0 mm	327.4 mm

Product description	Lifespan			Additional product data			Capabilities		Certificates & standards
	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content	Mercury-free	Burning position	Dimmable	Energy efficiency class
HALOLINE 750 W 230 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C
HALOLINE 1000 W 230 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C
HALOLINE 1000 W 240 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C
HALOLINE 1500 W 230 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C
HALOLINE 1500 W 240 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C
HALOLINE 2000 W 230 V R7S <sup>1)</sup>	2000 h	2000 h	50000	R7s	0.0 mg	Yes	p15	Yes	C

Product description	Energy consumption	Country-specific categorizations
		ILCOS
HALOLINE 750 W 230 V R7S <sup>1)</sup>	750 kWh/1000h	HDG-750-230-R7s-191,1
HALOLINE 1000 W 230 V R7S <sup>1)</sup>	1000 kWh/1000h	HDG-1000-230-R7s-191,1
HALOLINE 1000 W 240 V R7S <sup>1)</sup>	1000 kWh/1000h	HDG-1000-240-R7s-191,1
HALOLINE 1500 W 230 V R7S <sup>1)</sup>	1500 kWh/1000h	HDG-1500-230-R7s-256,1
HALOLINE 1500 W 240 V R7S <sup>1)</sup>	1500 kWh/1000h	HDG-1500-240-R7s-256,1
HALOLINE 2000 W 230 V R7S <sup>1)</sup>	2000 kWh/1000h	HDG-2000-230-R7s-333

1) Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

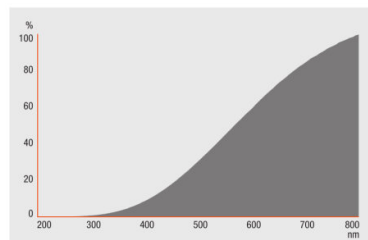

HALOLINE 750 W 230 V R7S, HALOLINE 1000 W 230 V R7S, HALOLINE 1000 W 240 V R7S, HALOLINE 1500 W 230 V R7S, HALOLINE 1500 W 240 V R7S, HALOLINE 2000 W 230 V R7S

HALOLINE 750 W 230 V R7S, HALOLINE 1000 W 230 V R7S, HALOLINE 1000 W 240 V R7S, HALOLINE 1500 W 230 V R7S, HALOLINE 1500 W 240 V R7S, HALOLINE 2000 W 230 V R7S

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300004167	HALOLINE 750 W 230 V R7S	Shipping carton box 12	245 mm x 85 mm x 112 mm	2.33 dm <sup>3</sup>	353.40 g
4050300004174	HALOLINE 1000 W 230 V R7S	Shipping carton box 12	245 mm x 85 mm x 112 mm	2.33 dm <sup>3</sup>	352.20 g
4050300209906	HALOLINE 1000 W 240 V R7S	Shipping carton box 12	245 mm x 85 mm x 112 mm	2.33 dm <sup>3</sup>	352.20 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300004181	HALOLINE 1500 W 230 V R7S	Shipping carton box 12	315 mm x 84 mm x 117 mm	3.10 dm <sup>3</sup>	453.52 g
4050300209920	HALOLINE 1500 W 240 V R7S	Shipping carton box 12	315 mm x 84 mm x 117 mm	3.10 dm <sup>3</sup>	453.52 g
4050300004204	HALOLINE 2000 W 230 V R7S	Shipping carton box 12	395 mm x 129 mm x 96 mm	4.89 dm <sup>3</sup>	596.20 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.