

PRODUCT FAMILY DATASHEET HALOLUX T

Halogen lamps for refrigerators



AREAS OF APPLICATION

- Domestic refrigerators

PRODUCT BENEFITS

- Compact dimensions
- UV filter
- Contains no mercury

PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable





TECHNICAL DATA

Product description	Electrical data				Photometrical data				Light technical data		Dimensions & weight
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Color temperature	Nominal luminous flux	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Starting time	Warm-up time (60 %)	Diameter
HALOLUX T 25 W 230 V E14	25.00 W	230.0 V	25.00 W	1.00	2700 K	260 lm	100	0.80	0.0 s	0.00 s	26.0 mm
HALOLUX T 40 W 230 V E14	40.00 W	230.0 V	40.00 W	1.00	2700 K	490 lm	100	0.80	0.0 s	0.00 s	26.0 mm
HALOLUX T 60 W 230 V E14	60.00 W	230.0 V	60.00 W	1.00	2800 K	820 lm	100	0.80	0.0 s	0.00 s	26.0 mm

Product description	Overall length	Light center length (LCL)	Lifespan			Additional product data			Capabilities
			Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content	Mercury-free	Burning position
HALOLUX T 25 W 230 V E14	80.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes	Any
HALOLUX T 40 W 230 V E14	80.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes	Any
HALOLUX T 60 W 230 V E14	80.0 mm	55.0 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes	Any

Product description	Dimmable	Certificates & standards		Country-specific categorizations
		Energy efficiency class	Energy consumption	ILCOS
HALOLUX T 25 W 230 V E14	Yes	D	25 kWh/1000h	HSGST/C/UB-25-230-E14-55
HALOLUX T 40 W 230 V E14	Yes	D	40 kWh/1000h	HSGST/C/UB-40-230-E14-55
HALOLUX T 60 W 230 V E14	Yes	D	60 kWh/1000h	HSGST/C/UB-60-230-E14-55

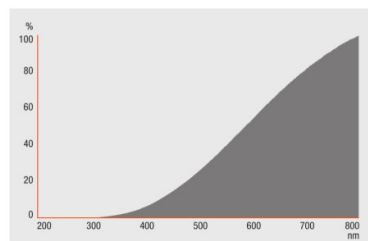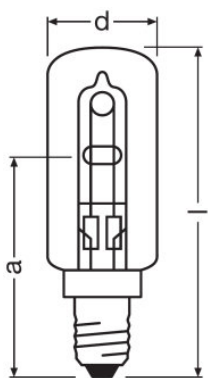

HALOLUX T 25 W 230 V E14, HALOLUX T 40 W 230 V E14, HALOLUX T 60 W 230 V E14

HALOLUX T 25 W 230 V E14, HALOLUX T 40 W 230 V E14, HALOLUX T 60 W 230 V E14

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300500942	HALOLUX T 25 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 140 mm	3.94 dm ³	520.50 g
4050300363707	HALOLUX T 40 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 140 mm	3.94 dm ³	520.50 g
4050300331638	HALOLUX T 60 W 230 V E14	Shipping carton box 15	225 mm x 125 mm x 156 mm	4.39 dm ³	463.20 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.