

PRODUCT DATASHEET

HALOPAR 20 75 W 230 V 30° GU10

HALOPAR 20 GU10 | Halogen lamps with parabolic reflector PAR20, with GU10 base



AREAS OF APPLICATION

- General illumination
- Shops
- Restaurants, hotels and similar prestigious applications

PRODUCT BENEFITS

- Brilliant accent light
- With whole glass reflector for brilliant lighting effects
- Approved for use in open luminaires (to IEC 60598-1)
- No transformer required
- UV filter
- Robust filament design thanks to innovative, unique bulb pinch technology
- Complies with IEC 60432-2 thanks to integrated fuse function
- Contains no mercury

PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 2,800 K

TECHNICAL DATA

Electrical data

Nominal wattage	75.00 W
Nominal voltage	230 V
Rated wattage	75.00 W
Power factor λ	1.00


Photometrical data

Nominal useful luminous flux 90°	520 lm
Luminous intensity	1900 cd
Rated color temperature	2800 K
Light color (designation)	Warm White
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.75
Rated useful luminous flux 90°	520 lm

Light technical data

Beam angle	30 °
Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



Diameter	64.0 mm
Length	65.7 mm
Overall length	62.0 mm
Outer bulb	PAR64
Maximum diameter	64.0 mm

Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	50000

Additional product data

Base (standard designation)	GU10
Mercury content	0.0 mg
Mercury-free	Yes
Product remark	Not suitable for outdoor use or damp conditions/Banned from 1.9.2016 as per EU phase-out plan

Capabilities

Burning position	Any
Dimmable	Yes


Certificates & standards

Energy efficiency class	D
Energy consumption	75 kWh/1000h

Country-specific categorizations

ILCOS	HAGS/UB-75-230-GU10-64/30
--------------	---------------------------

Light Distribution

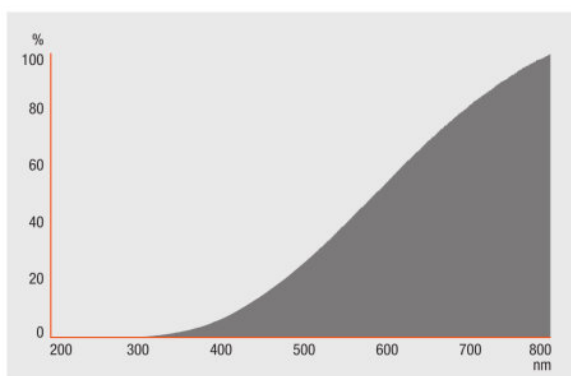

Spectral power distribution

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300856971	HALOPAR 20 75 W 230 V 30° GU10	Shipping carton box 20	303 mm x 165 mm x 132 mm	6.60 dm ³	1422.60 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.