

# PRODUCT FAMILY DATASHEET

## DAMP PROOF SLIM VALUE

Damp-proof luminaire with slim housing



---

### AREAS OF APPLICATION

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

---

### PRODUCT BENEFITS

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Very slim housing
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Tool-free electrical connection due to push button connector
- 3 years guarantee
- Easy access to electrical terminal thanks end caps with clip mechanism

---

### PRODUCT FEATURES

- High luminous efficacy: up to 110 lm/W
- Beam angle: 120°
- Type of protection: IP65






TECHNICAL DATA

Product description	Electrical data			Luminaire control gear data				Photometric data
	Nominal wattage	Nominal voltage	Mains frequency	Output current	Max. no. of lum. on circuit break. B16 A	Max. no. of lum. on circuit break. C10 A	Max. no. of lum. on circuit break. C16 A	Color temperature
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	77	48	77	4000 K
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	36.00 W	220...240 V	50/60 Hz	460 mA	77	48	77	6500 K
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	50.00 W	220...240 V	50/60 Hz	590 mA	55	35	55	4000 K
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	50.00 W	220...240 V	50/60 Hz	590 mA	55	35	55	6500 K

Product description	Luminous flux	Light color (designation)	Color rendering index Ra	Light technical data	Dimensions & weight				Colors & materials		
				Beam angle	Length	Width	Height	Product weight	Body material	Product color	Housing color
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	4000 lm	Cool White	>80	120 °	1200 mm	35.0 mm	48.0 mm	450.00 g	Polycarbonate (PC)	White	White
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	4000 lm	Cool Daylight	>80	120 °	1200 mm	35.0 mm	48.0 mm	450.00 g	Polycarbonate (PC)	White	White
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	5500 lm	Cool White	>80	120 °	1500 mm	35.0 mm	48.0 mm	510.00 g	Polycarbonate (PC)	White	White
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	5500 lm	Cool Daylight	>80	120 °	1500 mm	35.0 mm	48.0 mm	510.00 g	Polycarbonate (PC)	White	White

Product description	Cover material	Temperatures & operating conditions	Lifespan			Capabilities	
		Ambient temperature range	Number of switching cycles	Lifespan L70/B50 at 25 °C	Lifespan L80/B10 at 25 °C	Lifespan L90/B10 at 25 °C	Dimmable
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	Polycarbonate (PC)	-20...+40 °C	100000	30000 h	27000 h	19000 h	No
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	Polycarbonate (PC)	-20...+40 °C	100000	30000 h	27000 h	19000 h	No
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	Polycarbonate (PC)	-20...+40 °C	100000	30000 h	27000 h	20000 h	No
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	Polycarbonate (PC)	-20...+40 °C	100000	30000 h	27000 h	20000 h	No

Product description	Type of connection	Ball shot safe	Certificates & standards		
			Protection class	Type of protection	Luminaire with limited surface temperature, class "D"
DP SLIM VALUE 1200 36 W 4000 K IP65 GY	Screwless terminal, 2-Pole	No	II	IP65	Yes
DP SLIM VALUE 1200 36 W 6500 K IP65 GY	Screwless terminal, 2-Pole	No	II	IP65	Yes
DP SLIM VALUE 1500 50 W 4000 K IP65 GY	Screwless terminal, 2-Pole	No	II	IP65	Yes
DP SLIM VALUE 1500 50 W 6500 K IP65 GY	Screwless terminal, 2-Pole	No	II	IP65	Yes

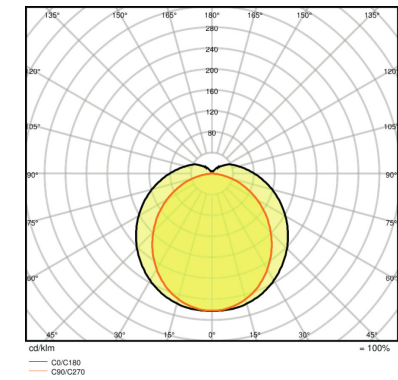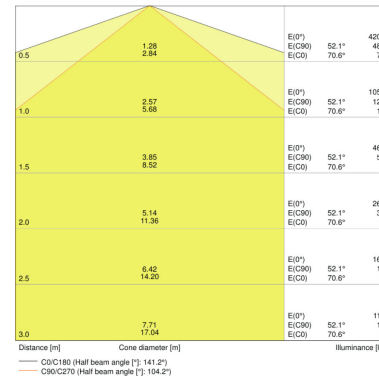



DP SLIM VALUE 1200 36 W 4000 K IP65 GY, DP SLIM VALUE 1200 36 W 6500 K IP65 GY

DP SLIM VALUE 1500 50 W 4000 K IP65 GY, DP SLIM VALUE 1500 50 W 6500 K IP65 GY

DP SLIM VALUE 1200 36 W 4000 K IP65 GY

DP SLIM VALUE 1200 36 W 6500 K IP65 GY

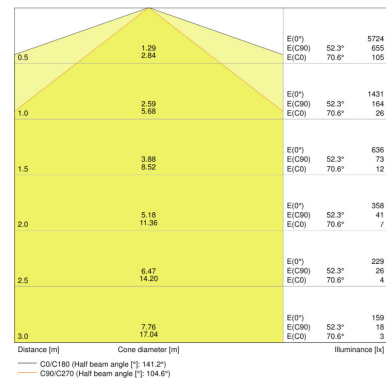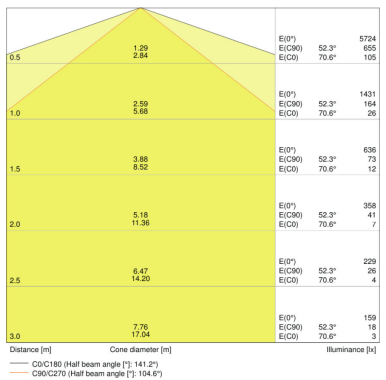

DP SLIM VALUE 1500 50 W 4000 K IP65 GY

DP SLIM VALUE 1500 50 W 6500 K IP65 GY

---

**EQUIPMENT / ACCESSORIES**

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

---

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

---

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075066465	Shipping carton box 20	1271 mm x 215 mm x 226 mm	14090.00 g	61.76 dm <sup>3</sup>
4058075066489	Shipping carton box 20	1271 mm x 215 mm x 226 mm	14090.00 g	61.76 dm <sup>3</sup>
4058075066502	Shipping carton box 20	1571 mm x 215 mm x 226 mm	12832.00 g	76.33 dm <sup>3</sup>
4058075066526	Shipping carton box 20	1571 mm x 215 mm x 226 mm	16890.00 g	76.33 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**REFERENCES / LINKS**

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.