

PRODUCT FAMILY DATASHEET

LED GX53

Flat LED Lamp with GX53 socket



AREAS OF APPLICATION

- Area lighting
- As a downlight for marking walkways, doors, stairs, etc.
- Background lighting
- Domestic applications
- Entrance lighting
- Exhibitions, department stores
- For indoor use only
- Kitchen lighting

PRODUCT BENEFITS

- Compact dimensions
- Easy installation
- Excellent luminous efficiency
- Good quality of light
- Low weight and low profile
- Three year guarantee

PRODUCT FEATURES

- 230 V line voltage operation
- High color consistency: ≤ 6 SDCM
- Not dimmable
- Type of protection: IP20
- Very long average lifetime: 15,000 h (15 years at 2.7 h per day)




TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Nominal luminous flux	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)
P GX53 25 100° 3.5 W/2700K GX53 ¹⁾	3.50 W	220...240 V	70	120	270 lm	270 lm	2700 K	0.70	Warm White
ST GX53 40 100° 6 W/2700K GX53 ¹⁾	6.00 W	220...240 V	45	75	470 lm	470 lm	2700 K	0.70	Warm White
ST GX53 40 100° 6 W/4000K GX53 ¹⁾	6.00 W	220...240 V	45	75	470 lm	470 lm	4000 K	0.70	Cool White
P GX53 40 100° 6 W/2700K GX53 ¹⁾	6.00 W	220...240 V	45	75	470 lm	470 lm	2700 K	0.70	Warm White
P GX53 40 100° 6 W/4000K GX53 ¹⁾	6.00 W	220...240 V	45	75	470 lm	470 lm	4000 K	0.70	Cool White

Product description	Color temperature	Luminous flux	Color rendering index Ra	Light technical data		Dimensions & weight		Temperatures & operating conditions	Lifespan	
				Warm-up time (60 %)	Beam angle	Overall length	Diameter	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles
P GX53 25 100° 3.5 W/2700K GX53 ¹⁾	2700 K	270 lm	≥80	< 0.50 s	100.00 °	31.0 mm	75.0 mm	53 °C	15000 h	100000
ST GX53 40 100° 6 W/2700K GX53 ¹⁾	2700 K	470 lm	≥80	< 0.50 s	100 °	31.0 mm	75.0 mm	75 °C	15000 h	100000
ST GX53 40 100° 6 W/4000K GX53 ¹⁾	4000 K	470 lm	≥80	< 0.50 s	100 °	31.0 mm	75.0 mm	75 °C	15000 h	100000
P GX53 40 100° 6 W/2700K GX53 ¹⁾	2700 K	470 lm	≥80	< 0.50 s	100.00 °	31.0 mm	75.0 mm	82 °C	15000 h	100000
P GX53 40 100° 6 W/4000K GX53 ¹⁾	4000 K	470 lm	≥80	< 0.50 s	100.00 °	31.0 mm	75.0 mm	81 °C	15000 h	100000

Product description	Additional product data			Capabilities	Certificates & standards	
	Base (standard designation)	Mercury content	Mercury-free	Dimmable	Energy efficiency class	Energy consumption
P GX53 25 100° 3.5 W/2700K GX53 ¹⁾	GX53	0.0 mg	Yes	No	A+	4 kWh/1000h
ST GX53 40 100° 6 W/2700K GX53 ¹⁾	GX53	0.0 mg	Yes	No	A+	6 kWh/1000h
ST GX53 40 100° 6 W/4000K GX53 ¹⁾	GX53	0.0 mg	Yes	No	A+	5 kWh/1000h
P GX53 40 100° 6 W/2700K GX53 ¹⁾	GX53	0.0 mg	Yes	No	A+	6 kWh/1000h
P GX53 40 100° 6 W/4000K GX53 ¹⁾	GX53	0.0 mg	Yes	No	A+	5 kWh/1000h

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

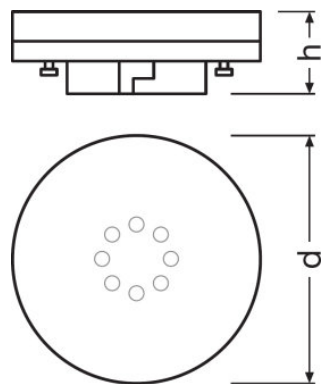

P GX53 25 100° 3.5 W/2700K GX53, ST
 GX53 40 100° 6 W/2700K GX53, ST
 GX53 40 100° 6 W/4000K GX53, P GX53
 40 100° 6 W/2700K GX53, P GX53 40
 100° 6 W/4000K GX53

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075105607	Shipping carton box 10	171 mm x 161 mm x 92 mm	663.00 g	2.53 dm ³
4058075052871	Shipping carton box 9	345 mm x 153 mm x 136 mm	785.00 g	7.18 dm ³
4058075052895	Shipping carton box 9	345 mm x 153 mm x 136 mm	788.00 g	7.18 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075105584	Shipping carton box 10	171 mm x 161 mm x 92 mm	739.00 g	2.53 dm ³
4058075105560	Shipping carton box 10	171 mm x 161 mm x 92 mm	745.00 g	2.53 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.