



# Proiettori da incasso / superficie

Semi-recessed  
surface spotlights

## **L'eleganza in proiezione**

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

## **Versatile elegance**

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Utilising replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.


Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.


Corpo in pressofusione di alluminio verniciato poliester. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW). Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera. (per Miniperfetto - R)

Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams). Integrated snoot.

Joint in chromed metal on white finish, or in brass on black finish. (for Miniperfetto - R)

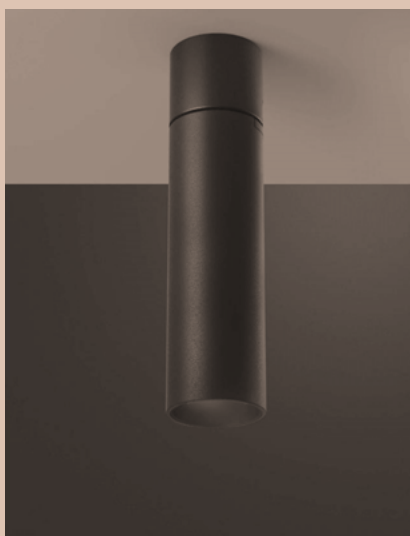

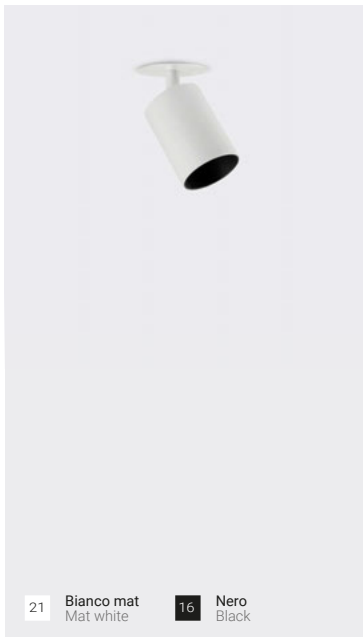



Codice Code	LED Lumen	Product Lumen	Watt	mA	Colour T (K)	CRI	Fascio Beam
-------------	-----------	---------------	------	----	--------------	-----	-------------

Con vetro zigrinato e rosone per applicazione a incasso  
With prismatic spread lens and canopy for recessed application

<b>756-679BN</b>	1080	658	9	250	3000	90	30°
	1500	915	12	350			
	2051	1252	18	500			
<b>756-679CN</b>	1050	640	9	250	2700	90	30°
	1390	847	12	350			
	1946	1189	18	500			

Driver da ordinare separatamente  
Drivers should be ordered separately

<b>81-04009</b>	Output 250mA
<b>81-04010</b>	Output 350mA Regolabile sul taglio di fase / Dimmable on the mains
<b>81-04011</b>	Output 500mA
<b>81-04002</b>	Output 500mA Dimmerabile DALI / DALI dimmable



30°

21 Bianco mat  
Mat white

16 Nero  
Black



Accessori ottici intercambiabili  
Replaceable optical accessories

		<b>28-9001-51</b> Ottica professionale S Professional optic device S			<b>28-9002-51</b> Ottica professionale M Professional optic device M			<b>28-9003-51</b> Ottica professionale W Professional optic device W
		<b>28-4139-100</b> Cilindro oro satinato Satinated gold baffle			<b>28-4163-30</b> Frangiluce alveolare Honeycomb			<b>28-4073-61</b> Vetro sabbato Frosted glass
		<b>28-4073-103</b> Vetro ellittico Elliptical spread lens						