



Proiettori da incasso / superficie

Semi-recessed
surface spotlights

L'eleganza in proiezione

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

Versatile elegance

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Utilising replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.

Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.

Corpo in pressofusione di alluminio verniciato poliester. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW). Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera. (per Miniperfetto - R)

Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams). Integrated snoot.


Joint in chromed metal on white finish, or in brass on black finish. (for Miniperfetto - R)



NANOPERFETTO - R

CON LENTE / WITH LENS

semi-recessed / surface – interior –

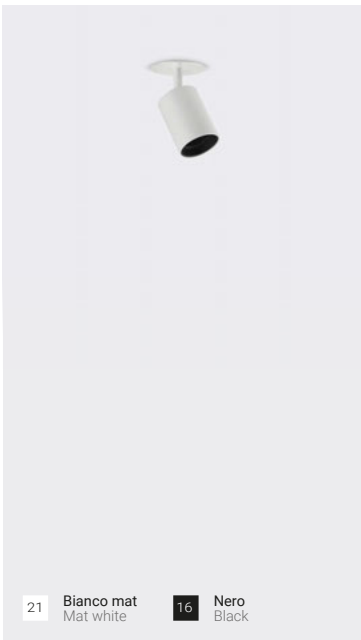

21 Bianco mat
Mat white

16 Nero
Black

Codice Code	LED Lumen	Product Lumen	Watt	mA	Colour T (K)	CRI	Fascio Beam
----------------	--------------	------------------	------	----	-----------------	-----	----------------

Con lente non sostituibile e rosone per applicazione a incasso
With not replaceable lens and canopy for recessed application

755-479BN	380	338	4	350	3000	90	14°
	520	463	6	500			


755-479CN	355	316	4	350	2700	90	14°
	490	436	6	500			

Driver da ordinare separatamente
Drivers should be ordered separately


81-02408 Output 350mA

81-04029 Output 500mA
Regolabile sul taglio di fase / Dimmable on the mains

81-04026 Output 500mA
Dimmerabile DALI / DALI dimmable



h 50 mm Ø 42 mm 0,1 kg



14°



Accessori ottici intercambiabili Replaceable optical accessories



28-4175-100
Cilindro oro satinato
Satinated gold baffle



28-4200-30
Frangiluce alveolare
Honeycomb