



Proiettori da incasso / superficie

Semi-recessed
surface spotlights

L'eleganza in proiezione

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

Versatile elegance

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Utilising replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.


Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.


Corpo in pressofusione di alluminio verniciato poliester. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW). Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera. (per Miniperfetto - R)

Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams). Integrated snoot.

Joint in chromed metal on white finish, or in brass on black finish. (for Miniperfetto - R)

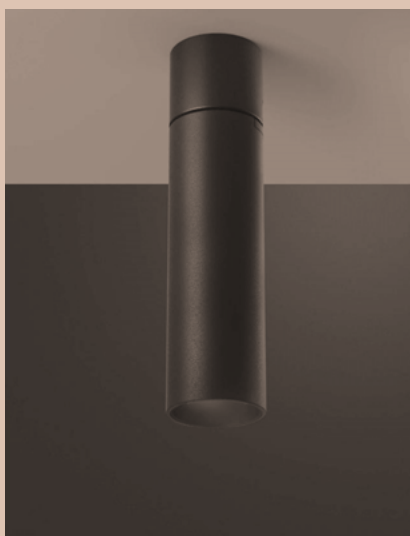

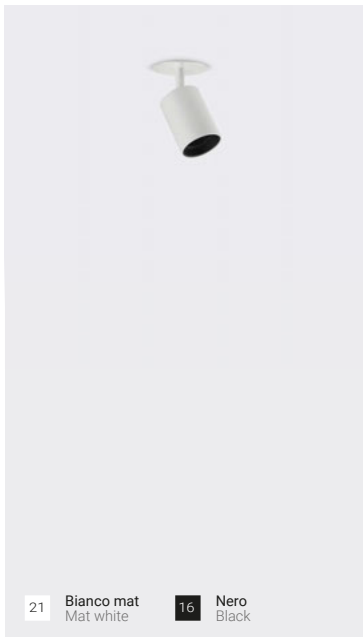

21 Bianco mat
Mat white

16 Nero
Black

Codice Code	LED Lumen	Product Lumen	Watt	mA	Colour T (K)	CRI	Fascio Beam
-------------	-----------	---------------	------	----	--------------	-----	-------------



Con vetro zigrinato e rosone per applicazione a incasso
With prismatic spread lens and canopy for recessed application

755-279BN	355	232	3,5	350	3000	90	34°
	490	320	4,5	500			
	650	425	6,5	700			
755-279CN	340	222	3,5	350	2700	90	34°
	470	307	4,5	500			
	620	405	6,5	700			


Driver da ordinare separatamente
Drivers should be ordered separately

81-02408	Output 350mA
81-04029	Output 500mA Regolabile sul taglio di fase / Dimmable on the mains
81-04027	Output 700mA Regolabile sul taglio di fase / Dimmable on the mains
81-04028	Output 700mA* Dimmerabile DALI / DALI dimmable

* Per una corretta installazione, considerare una profondità di incasso a soffitto di 200 mm
For a correct installation, please consider a ceiling recessed depth of 200 mm



h 50 mm Ø 42 mm 0,1 kg



34°

Accessori ottici intercambiabili
Replaceable optical accessories

		<p>28-9022-51S Ottica professionale S Professional optic device S</p> <p>3,5W 4,5W 6,5W</p>			<p>28-9022-51M Ottica professionale M Professional optic device M</p> <p>3,5W 4,5W 6,5W</p>			<p>28-9022-51W Ottica professionale W Professional optic device W</p> <p>3,5W 4,5W 6,5W</p>
		<p>28-4175-100 Cilindro oro satinato Satined gold baffle</p>			<p>28-4200-30 Frangiluce alveolare Honeycomb</p>			