



# Proiettori da incasso / superficie

Semi-recessed  
surface spotlights

## **L'eleganza in proiezione**

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

## **Versatile elegance**

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Utilising replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.


Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.

Corpo in pressofusione di alluminio verniciato poliester. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW). Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera. (per Miniperfetto - R)


Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams). Integrated snoot.

Joint in chromed metal on white finish, or in brass on black finish. (for Miniperfetto - R)

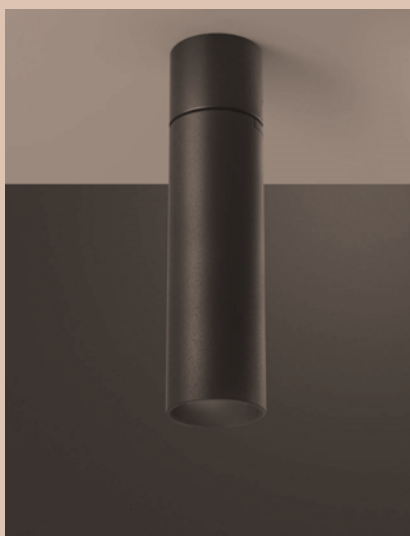

**MICROPERFETTO LOW - R**  
CON LENTE / WITH LENS

semi-recessed / surface – interior –

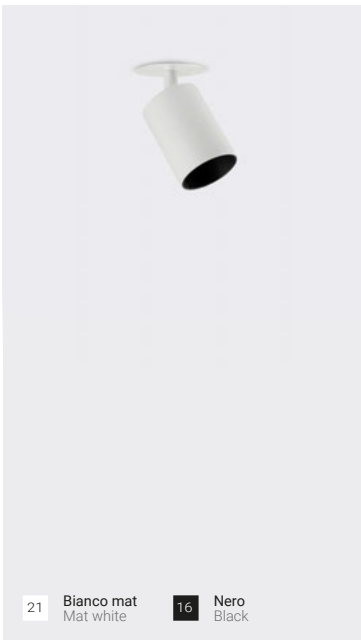

21 Bianco mat  
Mat white

16 Nero  
Black

Codice Code	LED Lumen	Product Lumen	Watt	mA	Colour T (K)	CRI	Fascio Beam
----------------	--------------	------------------	------	----	-----------------	-----	----------------


Con lente non sostituibile e rosone per applicazione a incasso  
With not replaceable lens and canopy for recessed application

**756-079BN** 700 – 8 700 3000 90 14°


**756-079CN** 650 – 8 700 2700 90 14°

Driver da ordinare separatamente  
Drivers should be ordered separately


**81-04027** Output 700mA  
Regolabile sul taglio di fase / Dimmable on the mains



h 50 mm Ø 55 mm 0,4 kg



14°



Accessori ottici intercambiabili  
Replaceable optical accessories



**28-4139-100**  
Cilindro oro satinato  
Satined gold baffle



**28-4163-30**  
Frangiluce alveolare  
Honeycomb