




Pendant Luminaires | 220-240 V | 4x2G11  
6858

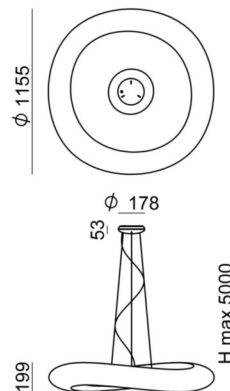

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Power	4 x 36 W
Lamp cap	4 x 2G11
Frequency	50 - 60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	neutral
Finishing mounting frame	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating



Pendant Luminaires | 220-240 V | 4x2G11  
**6858**

Double emission pendant luminaires for indoor application. Fluorescent lamp included 36W, lamp cap 4x2G11.


The diffuser is made of pe; the mounting frame is made of aluminium, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 12.000 kg. The power supply driver is included in the delivery.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	88 %
Luminous flux (source)	11600 lm
Luminaire luminous flux	10219 lm
Consumption	136 W
Luminaire efficacy	85 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical 2
Ottica C0/C180	122°
Ottica C90/C270	116°

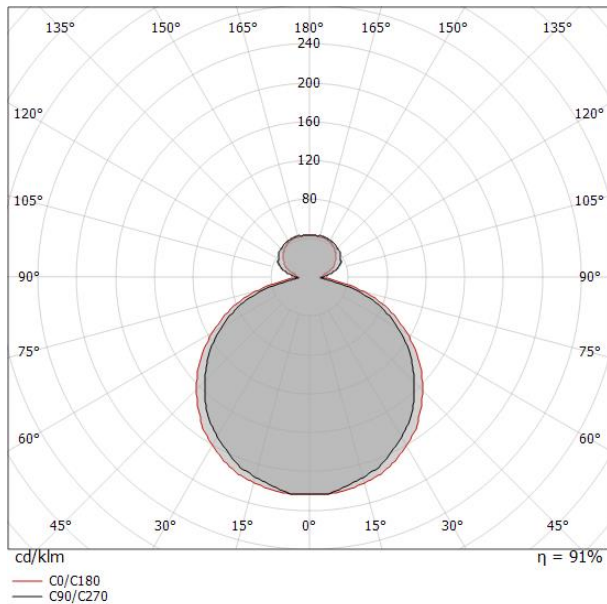

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.60 1.82	10377	58.0° 775	61.2° 582	
1.0	3.20 3.64	2594	58.0° 194	61.2° 146	
1.5	4.80 5.46	1153	58.0° 86	61.2° 65	
2.0	6.40 7.28	649	58.0° 48	61.2° 36	
2.5	8.00 9.09	415	58.0° 31	61.2° 23	
3.0	9.60 10.91	288	58.0° 22	61.2° 16	

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 122.4°)  
 — C90/C270 (Half-peak divergence: 116.0°)