





Ceiling Lights | 220-240 V | 2xE27
90224

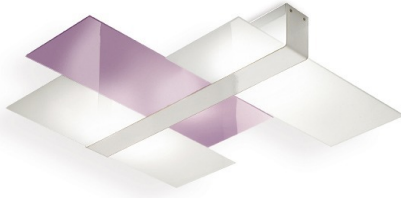

| Technical data | |
|--|-----------------------|
| Installation position | Wall lights - Ceiling |
| Installation environment | Indoor |
| Lamp cap | 2 x E27 Max 57W |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | frontal |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 3.760 Kg |

| Finishing casing | |
|--------------------|---------------------------------|
| Material | Iron |
| Colour | white |
| Processing | Coating |
| Finishing diffuser | |
| Material | Glass - Glass |
| Colour | white - lilac |
| Processing | Silk-screening - Silk-screening |



Ceiling Lights | 220-240 V | 2xE27
90224

Double emission ceiling lights for indoor application. Compatibility: LED lamp, halogen 57 W, compact fluo 30 W; lamp cap 2xE27.

The device body is made of iron and features a white finish, processed by means of coating; the diffuser is made of glass with a silk-screening treatment; the diffuser is made of glass with a silk-screening treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3.760 kg.

The device features protection class I and can be wall lights or ceiling-mounted.

Illuminotechnical Features

| | |
|------------------------|---------|
| Luminous flux (source) | 1830 lm |
| Colour temperature | 2800 K |
| Colour rendering index | 100 Ra |