

Product code	Colour
717-329-21	Mat white
717-329-16	Black
717-329-52	Silver, on demand

### General Specifications

Product type	: Spotlights
Mounting type	: Ceiling - surface
Description	: MiniKyclos is a compact spotlight with base, specially developed for high efficiency COB LED sources of the last generation. It is characterized by an innovative system of passive heat dissipation. Body in die-cast aluminium without visible screws, with a front part in clear polycarbonate, rear painted for a brighter finish. Professional optics to get different beam angles and optical devices for a better visual comfort are available as accessories.

Indoor/outdoor lights	: Indoor
Applications	: Museums, Retail ,Shops, Showrooms

### Lighting specifications

Average lamp life (h)	: 50.000
Lamp description	: LED 3150lm 27W 3000K
Nominal lumens on thermal regime	: 3150
Efficiency L.O.R. (%)	: 92,6
Delivered lumens (lm)	: 2917
Lamp wattage (W)	: 27
Color temperature (K)	: 3000

### Physical Specifications

Body	: Die-cast aluminium
Finishes	: Polyester painted
Reflector	: Mirror-metallized thermoplastic material
Thermal Dissipation	: Passive

### Electrical Specifications



Glow wire (°C)	: 850
Driver	: Included
Driver mounting	: Integrated
Voltage (V)	: 220/240
Frequency (Hz)	: 50/60

### Weight and Dimensions

Width (mm)	: 120
Height (mm)	: 88
Weight (Kg)	: 0.9


### Optical Specifications


Light distribution	: Symmetric
Light emission	: Direct
Light beam	: 30°
Horizontal orientation	: 350°
Vertical tilt	: 350°
Note	: 17°, 55° (mirror metallized), 70° (white) optics are available on demand. Honeycomb code 28-3959-30, clear tempered glass code 28-3958-58, pink tempered glass for food applications code 28-3958-32 to be used only together with snoot code 28-3957-30.

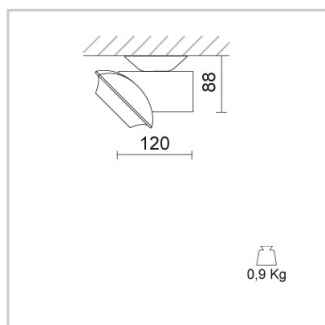

Unified Glare Rating (U.G.R.) : <19

## Accessories

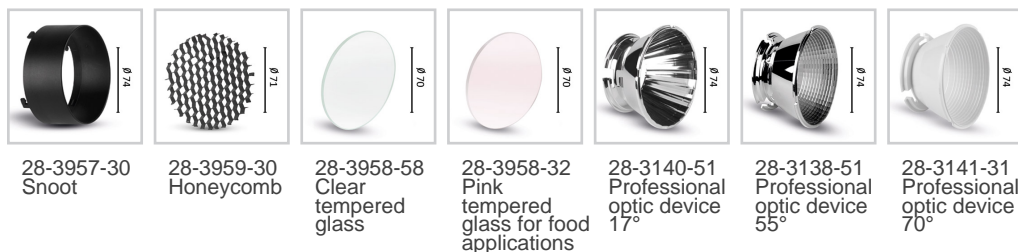

Lamps	Lamp categories	Lamp type	Lamp wattage (W)	Nominal lumens on thermal regime (lm)	Color rendering (CRI)
	LED	COB LED	27	3150	90

## Pictures and Applications

