


Oh! Smash_FL65



Floor Lamp | 220-240 V | 1xE27
15215



Ø 380

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Lamp cap	1 x E27 Max 30W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5 m
Electric socket	Type F
Resin potting	No
Type of light emission	Single emission
Net weight	2.040 Kg

Finishing diffuser	
Material	PE
Colour	translucent

Oh! Smash_FL65



Floor Lamp | 220-240 V | 1xE27
15215

Single emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 30 W, compact fluo 14 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 2.040 kg.

The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features


Light Output Ratio (LOR)	82 %
Luminous flux (source)	405 lm
Luminaire luminous flux	334 lm
Consumption	30 W
Luminaire efficacy	13 lm/W
Colour rendering index	100 Ra

UGR

X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	176°

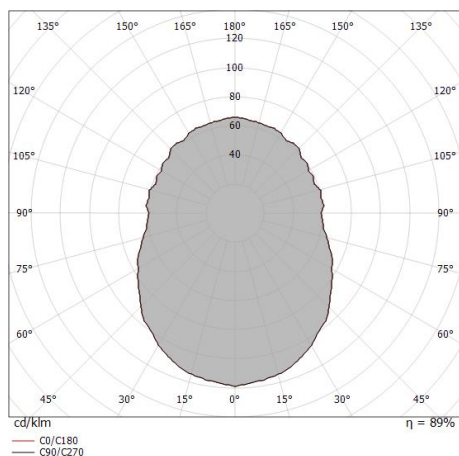

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	28.64	$E(0^\circ)$ 193 $E(C0)$ 88.0° 0
1.0	57.27	$E(0^\circ)$ 48 $E(C0)$ 88.0° 0
1.5	85.91	$E(0^\circ)$ 21 $E(C0)$ 88.0° 0
2.0	114.55	$E(0^\circ)$ 12 $E(C0)$ 88.0° 0
2.5	143.18	$E(0^\circ)$ 8 $E(C0)$ 88.0° 0
3.0	171.82	$E(0^\circ)$ 5 $E(C0)$ 88.0° 0

— C0/C180 (Half-peak divergence: 176.0°)