


Oh! Smash_FL65



Floor Lamp | 220-240 V | 1xE27
15218

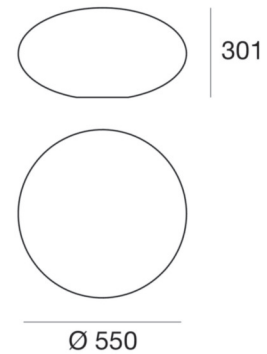

| Technical data | |
|--|------------------|
| Type | Floor Lamp |
| Installation position | Floor |
| Installation environment | Outdoor |
| Lamp cap | 1 x E27 Max 46W |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | upward |
| Safety class | 2 |
| IP | IP65 |
| IK | IK10 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Induction | No |
| Emergency mode | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 5 m |
| Electric socket | Type F |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 3.190 Kg |

| Finishing diffuser | |
|--------------------|-------------|
| Material | PE |
| Colour | translucent |

Oh! Smash_FL65



Floor Lamp | 220-240 V | 1xE27
15218

Single emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 3.190 kg.


The power supply cable is included and features.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

| Illuminotechnical Features | |
|----------------------------|---------|
| Light Output Ratio (LOR) | 82 % |
| Luminous flux (source) | 700 lm |
| Luminaire luminous flux | 577 lm |
| Consumption | 46 W |
| Luminaire efficacy | 15 lm/W |
| Colour rendering index | 100 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 16 |
| UGR axial | < 16 |

| OPTICAL | |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| C0/C180 optics | 176° |

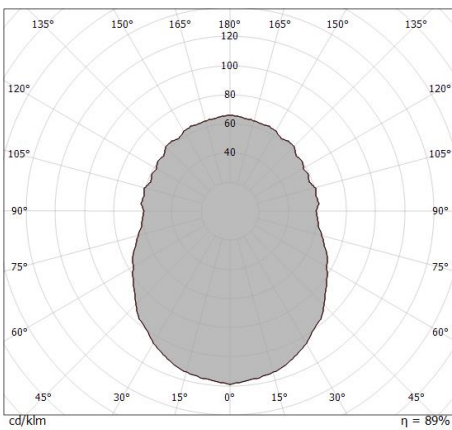


cd/km
 — C0/C180
 — C90/C270

| | | | | |
|-----|--------|----------------|-------|----------|
| 0.5 | 28.64 | E(0°) E(C0) | 88.0° | 333 0 |
| 1.0 | 57.27 | E(0°) E(C0) | 88.0° | 83 0 |
| 1.5 | 85.91 | E(0°) E(C0) | 88.0° | 37 0 |
| 2.0 | 114.55 | E(0°) E(C0) | 88.0° | 21 0 |
| 2.5 | 143.18 | E(0°) E(C0) | 88.0° | 13 0 |
| 3.0 | 171.82 | E(0°) E(C0) | 88.0° | 9 0 |

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0/C180 (Half-peak divergence: 176.0°)




Oh! Smash_FL65 | Floor Lamp | Accessories
15218



Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs

Code
14931



Connector

Code
14992