



Pendant Luminaires | 220-240 V | topLED 27 W 700 mA | CRI 90
10138

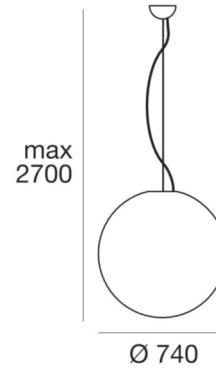

| Technical data | |
|--|------------------|
| Type | Surface |
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward |
| Power | 27 W |
| Luminous flux (source) | 3674 lm |
| Frequency | 50 - 60 Hz |
| CCT / Tone | 3000 K |
| Colour rendering index | 90 Ra |
| AC / DC | AC-DC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Driver included | Driver |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 7.479 Kg |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |



Pendant Luminaires | 220-240 V | topLED 27 W 700 mA | CRI 90
10138

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3674 lm, with a 136.1 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP20; the total weight is of 7.479 kg.

The total absorbed power is 27 W.

The device features protection class I and can be ceiling-mounted.

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 77 % |
| Luminous flux (source) | 3674 lm |
| Luminaire luminous flux | 2856 lm |
| Consumption | 27 W |
| Luminaire efficacy | 105 lm/W |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 16 |
| UGR axial | < 16 |

| OPTICAL | |
|-----------------------------|-------------|
| Light distribution symmetry | Symmetrical |
| C0/C180 optics | 180° |