




Wall Lights | 220-240 V | 1xR7s
1136



| Technical data | |
|--|---------------------|
| Installation position | Wall lights |
| Installation environment | Indoor |
| Power | 1 x 120 W |
| Lamp cap | 1 x R7s |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | downward and upward |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 1.520 Kg |

| Finishing diffuser | |
|--------------------|--------------|
| Material | Glass |
| Colour | white |
| Processing | Sandblasting |

Wall Lights | 220-240 V | 1xR7s 1136

Double emission wall lights for indoor application. Halogen lamp included 120W, lamp cap 1xR7s.


The diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.520 kg.

The device features protection class I and can be wall lights-mounted.

| Illuminotechnical Features | |
|----------------------------|---------|
| Light Output Ratio (LOR) | 55 % |
| Luminous flux (source) | 2250 lm |
| Luminaire luminous flux | 1244 lm |
| Consumption | 120 W |
| Luminaire efficacy | 18 lm/W |
| Colour temperature | 2900 K |
| Colour rendering index | 100 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 16 |
| UGR axial | < 19 |

| OPTICAL | |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| Ottica C0/C180 | 102° |

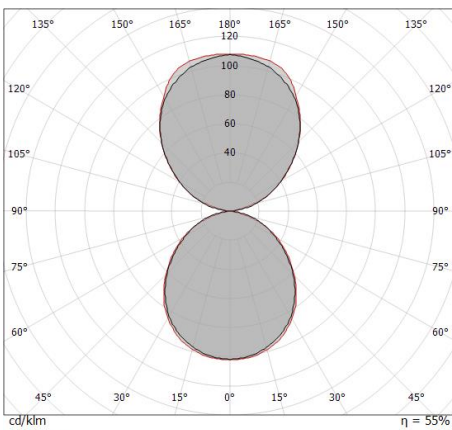

| Distance [m] | Cone diameter [m] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------|--------|-------|
| 0.5 | 1.23 1.28 | 917 | 115 | 108 |
| 1.0 | 2.47 2.55 | 229 | 29 | 27 |
| 1.5 | 3.70 3.83 | 102 | 13 | 12 |
| 2.0 | 4.94 5.10 | 57 | 7 | 7 |
| 2.5 | 6.17 6.38 | 37 | 5 | 4 |
| 3.0 | 7.41 7.65 | 25 | 3 | 3 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 103.8°)
— C90/C270 (Half-peak divergence: 102.0°)