


# Halfpipe



Wall Lights | 220-240 V | topLED 9 W 500 mA | CRI 90  
8391

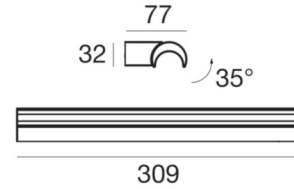

Technical data	
Type	Surface
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	9 W
Source lumens	940 lm
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
Safety class	1
IP	IP44
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	Swivelling
total angle (horizontal plane)	35 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	Silicone
Colour	opaline

Wall Lights | 220-240 V | topLED 9 W 500 mA | CRI 90  
8391

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 30 topLED LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 940 lm, with a 104.4 lm/W nominal luminous efficacy.

The diffuser is made of silicone; the mounting frame is made of aluminium, with a translucent finish. The ingress protection degree is IP44;

The total absorbed power is 9 W.

The device features protection class I and can be wall lights-mounted.

### Illuminotechnical Features

Light Output Ratio (LOR)	61 %
Source lumens	940 lm
Delivered lumens	582 lm
Consumption	9 W
Luminaire efficacy	64 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

### LED Life / Failure Ratio


L80 B20 C0 80000h
-------------------

### UGR

X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 16

### OPTICAL

Light distribution simmetry	Asymmetrical
C0/C180 optics	112°
C90/C270 optics	68°

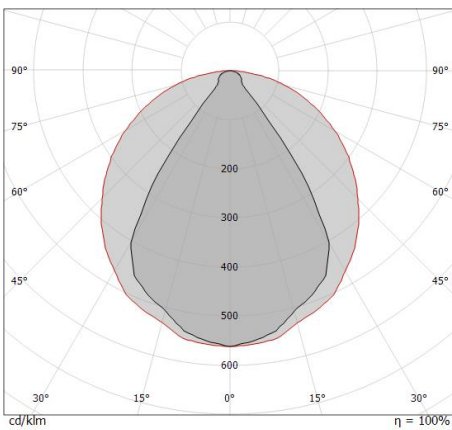

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.68 1.49	E(0°) 1308 E(C90) 372 E(C0) 114
1.0	1.35 2.98	E(0°) 327 E(C90) 93 E(C0) 28
1.5	2.03 4.46	E(0°) 145 E(C90) 41 E(C0) 13
2.0	2.71 5.95	E(0°) 82 E(C90) 23 E(C0) 7
2.5	3.39 7.44	E(0°) 52 E(C90) 15 E(C0) 5
3.0	4.06 8.93	E(0°) 36 E(C90) 10 E(C0) 3

— C0/C180 (Half-peak divergence: 112.2°)  
— C90/C270 (Half-peak divergence: 68.2°)