


2Nights_W1



Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7944



Technical data	
Designer	Davide Oppizzi
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Flood
Light emission direction	upward
Power	4 W
Luminous flux (source)	363 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	Yes
Tilting	Yes
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium - Aluminium
Colour	gold - black RAL 9005
Processing	Electroplating - Coating

Finishing diffuser	
Material	PC
Colour	amber

Finishing mounting frame	
Material	Aluminium
Colour	black RAL 9005
Processing	Coating



Wall Lights | 220-240 V | topLED 4 W 1050 mA | CRI 90
7944

Single emission wall lights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 363 lm, with a 90.8 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a black ral 9005 finish, processed by means of coating. The device body is made of aluminium and features a gold finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of aluminium, with a black ral 9005 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 0,872 kg. The power supply driver is included in the delivery.



The total absorbed power is 4 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	42 %
Luminous flux (source)	363 lm
Luminaire luminous flux	156.07 lm
Consumption	4 W
Luminaire efficacy	39 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 28

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	69°

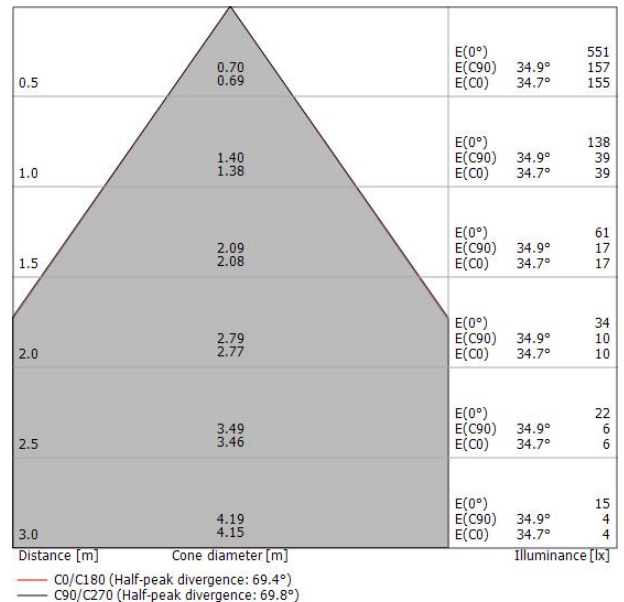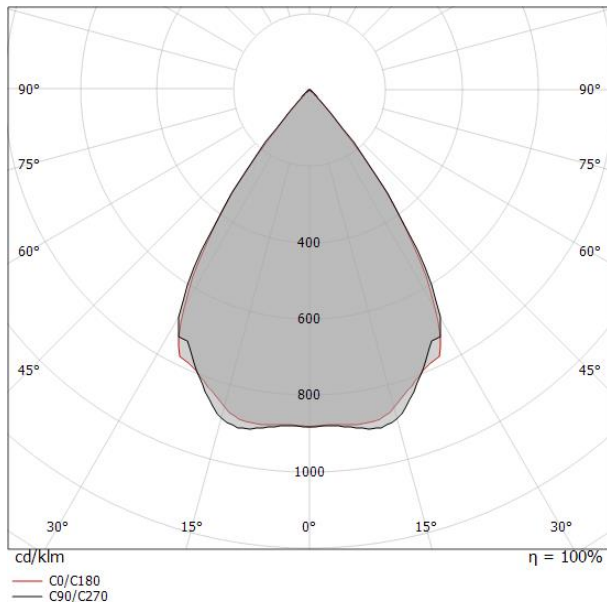



Diffuser

Code

KIT0036



Diffuser

Code

KIT0056



Diffuser

Code

KIT0058