


## PRODUCT DATASHEET

### ET-PARROT 105/220...240 I

ET-PARROT | Electronic transformers for low-voltage halogen lamps

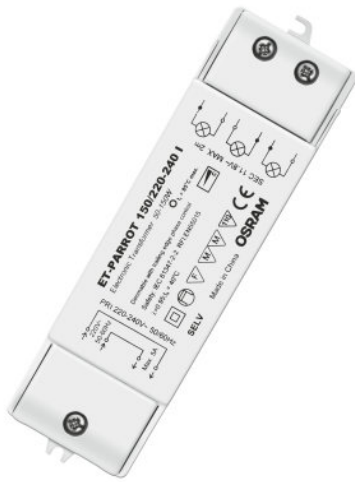

#### AREAS OF APPLICATION

- Effect and accent lighting
- Living rooms
- Object lighting
- Conference rooms
- Restaurants
- Recessed and surface-mounted furniture luminaires
- Shop lighting
- Event rooms

#### PRODUCT BENEFITS

- Very low power loss thanks to high efficacy
- Protective operation throughout the entire partial-load range for long lamp life

#### PRODUCT FEATURES

- Line frequency: 50...60 Hz
- RI suppression: to EN 55015 (A1: 2007)/CISPR 15, EN 55022
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- Energy efficiency:  $\geq 91$  % (according to ErP regulation 2012/1194/EC)
- Safety: to EN 61347
- Short-circuit protection, overload protection, overtemperature protection: electronically reversible
- Electrical isolation between the primary side and the secondary side
- Dimmable on the leading edge and trailing edge

**TECHNICAL DATA**

Electrical data

<b>Lamp wattage</b>	35...105 W
<b>Line current</b>	0.45 A <sup>1)</sup>
<b>Power factor λ</b>	0.95 <sup>2)</sup>
<b>Operating frequency</b>	40 kHz <sup>3)</sup>
<b>Nominal output voltage</b>	11.5 V <sup>4)</sup>
<b>Nominal voltage</b>	220...240 V
<b>Input voltage AC</b>	198...264 V
<b>Mains frequency</b>	50...60 Hz
<b>System wattage [AGGR]</b>	111.00 W
<b>Max. ECG no. on circuit breaker 10 A (B)</b>	23
<b>Max. ECG no. on circuit breaker 16 A (B)</b>	38
<b>ECG efficiency</b>	95 % <sup>5)</sup>
<b>Galvanic isolation primary/secondary</b>	4.00 kV <sup>6)</sup>
<b>Inrush current</b>	0.5 A

<sup>1)</sup> Effectively

<sup>2)</sup> Minimum


<sup>3)</sup> Approximately

<sup>4)</sup> 105 W / 35 W

<sup>5)</sup> At full load

<sup>6)</sup> eff

— **Dimensions & weight**



<b>Length</b>	128.0 mm
<b>Width</b>	38.0 mm
<b>Height</b>	31.0 mm
<b>Mounting hole spacing, length</b>	119.0 mm
<b>Cable cross-section, input side</b>	0.75 mm <sup>2</sup>
<b>Cable cross-section, output side</b>	0.75 mm <sup>2</sup>

Wire preparation length, input side	12 / 6.0 mm <sup>1)</sup>
Wire preparation length, output side	12 / 6.0 mm <sup>1)</sup>
Product weight	130.00 g

<sup>1)</sup> Cable sheath / Wire

### Temperatures & operating conditions

Ambient temperature range	0...+40 °C
Maximum temperature at tc test point	85 °C

### Additional product data

Design / version	Compact
------------------	---------





### Capabilities

Dimming method	Trailing-edge phase control
Overload protection	Reversible
Overheating protection	Automatic reversible
Short-circuit protection	Automatic reversible
Max. cable length to lamp/LED module	2.0 m
Cable/wire types, input side	H03VV-F 2x0.75 mm <sup>2</sup>
Cable/wire types, output side	H03VV-F 2x0.75 mm <sup>2</sup>
Dimmable	Yes
Dimming range	0...100 %
No-load proof	Yes
Suitable for fixtures with prot. class	II

### Certificates & standards

Approval marks – approval	C-Tick / CE
Standards	Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547/Acc. to EN 61347
Type of protection	IP20

### DOWNLOAD DATA

File
 Certificates 504206_VDE-EMC-Certificate ET-PARROT
 Certificates 504178_EAC HT family
 Declarations of conformity 710835_EC-DOC Halotronic
 On-Pack-Info 590730_EAC - ET-PARROT ET-ZE



CAD data  
343999\_ET-PARROT FILE STP

## LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321096616	ET-PARROT 105/220...240 I	Shipping carton box 50	290 mm x 206 mm x 220 mm	13.14 dm <sup>3</sup>	6971.00 g
4008321111579	ET-PARROT 105/220...240 I	Shipping carton box 50	290 mm x 206 mm x 220 mm	13.14 dm <sup>3</sup>	6971.25 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.