



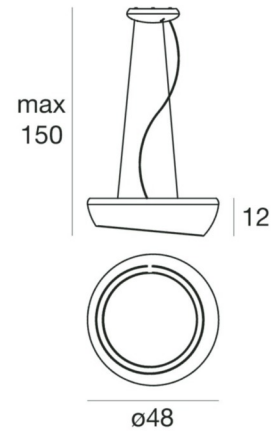

Pendant Luminaires | 220-240 V | 1x2GX13
7306

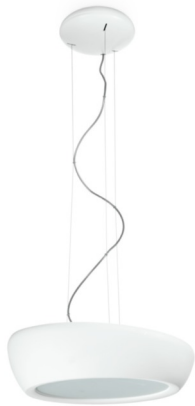

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 55 W
Lamp cap	1 x 2GX13
Frequency	50 - 60 Hz
Optics	General Lighting
Light emission direction	downward
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	plaster
Colour	white

Finishing diffuser	
Material	Glass
Colour	white
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Colour	white
Processing	Coating



Pendant Luminaires | 220-240 V | 1x2GX13
7306

Double emission pendant luminaires for indoor application. Fluorescent lamp included 55W, lamp cap 1x2GX13.

The device body is made of plaster and features a white finish; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 6.000 kg. The power supply driver is included in the delivery.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Luminous flux (source)	4200 lm
Colour temperature	3000 K
Colour rendering index	80 Ra