

PRODUCT FAMILY DATASHEET

PARATHOM STICK

LED lamps, classic stick shape



AREAS OF APPLICATION

- All domestic rooms, especially where the lamps are visible
- Wherever compact and efficient lamps are needed
- Where the lamps need to last a long time or have to withstand frequent on/off switching

PRODUCT BENEFITS

- Low energy consumption
- Attractive lamp appearance

PRODUCT FEATURES

- LED alternative to conventional lamps
- Good quality of light; color rendering index $R_a: \geq 80$; constant chromaticity
- Mercury-free lamps




TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Nominal luminous flux	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)
P STICK 60 FR 8 W/2700K E27 ¹⁾	8.00 W	220...240 V	172	275	806 lm	806 lm	2700 K	0.70	Warm White
P STICK 60 FR 8 W/4000K E27 ¹⁾	8.00 W	220...240 V	172	275	806 lm	806 lm	4000 K	0.70	Cool White
P STICK 75 FR 10 W/2700K E27 ¹⁾	10.00 W	220...240 V	135	216	1050 lm	1050 lm	2700 K	0.70	Warm White
P STICK 75 FR 10 W/4000K E27 ¹⁾	10.00 W	220...240 V	135	216	1050 lm	1050 lm	4000 K	0.70	Cool White

Product description	Color temperature	Luminous flux	Color rendering index Ra	Light technical data	Dimensions & weight		Temperatures & operating conditions	Lifespan	
				Warm-up time (60 %)	Overall length	Diameter	Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles
P STICK 60 FR 8 W/2700K E27 ¹⁾	2700 K	806 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	90 °C	15000 h	100000
P STICK 60 FR 8 W/4000K E27 ¹⁾	4000 K	806 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	90 °C	15000 h	100000
P STICK 75 FR 10 W/2700K E27 ¹⁾	2700 K	1050 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	97.1 °C	15000 h	100000
P STICK 75 FR 10 W/4000K E27 ¹⁾	4000 K	1050 lm	≥80	< 0.50 s	115.0 mm	40.4 mm	97.1 °C	15000 h	100000

Product description	Additional product data			Capabilities	Certificates & standards	
	Base (standard designation)	Mercury content	Mercury-free	Dimmable	Energy efficiency class	Energy consumption
P STICK 60 FR 8 W/2700K E27 ¹⁾	E27	0.0 mg	Yes	No	A+	8 kWh/1000h
P STICK 60 FR 8 W/4000K E27 ¹⁾	E27	0.0 mg	Yes	No	A+	8 kWh/1000h
P STICK 75 FR 10 W/2700K E27 ¹⁾	E27	0.0 mg	Yes	No	A+	10 kWh/1000h
P STICK 75 FR 10 W/4000K E27 ¹⁾	E27	0.0 mg	Yes	No	A+	10 kWh/1000h

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

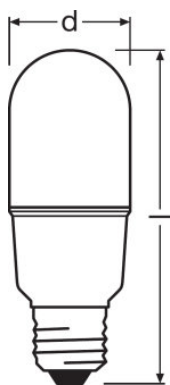

P STICK 60 FR 8 W/2700K E27, P STICK
60 FR 8 W/4000K E27, P STICK 75 FR 10
W/2700K E27, P STICK 75 FR 10
W/4000K E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075125858	Shipping carton box 10	197 mm x 85 mm x 138 mm	551.00 g	2.31 dm ³
4058075125797	Shipping carton box 10	197 mm x 85 mm x 138 mm	551.00 g	2.31 dm ³
4058075125834	Shipping carton box 10	197 mm x 85 mm x 138 mm	561.00 g	2.31 dm ³
4058075125810	Shipping carton box 10	197 mm x 85 mm x 138 mm	561.00 g	2.31 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.