




Wall Lights | 220-240 V | topLED 9 W | CRI 90  
7838



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	9 W
Luminous flux (source)	1260 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.654 Kg

Finishing casing	
Material	Wood - Iron
Colour	cherry wood - nickel
Processing	Electroplating

Finishing diffuser	
Material	Glass
Colour	white
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Colour	white
Processing	Coating



Wall Lights | 220-240 V | topLED 9 W | CRI 90  
7838

Double emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 36 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1260 lm, with a 140.0 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of iron and features a nickel finish, processed by means of electroplating. The device body is made of wood and features a cherry wood finish; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 0.654 kg. The power supply driver is included in the delivery.


The total absorbed power is 9 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	60 %
Luminous flux (source)	1260 lm
Luminaire luminous flux	758 lm
Consumption	9 W
Luminaire efficacy	84 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L80C0B20

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 22

OPTICAL	
Light distribution simmetry	Asymmetrical
Ottica C0/C180	120°
Ottica C90/C270	162°

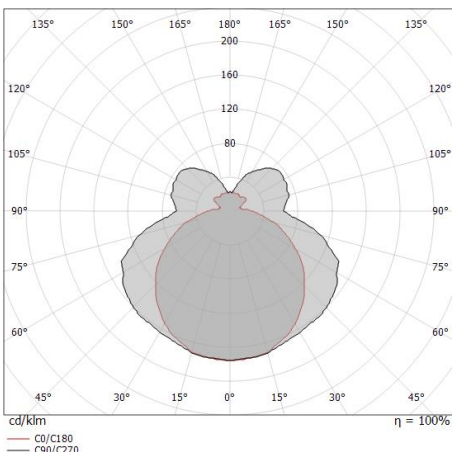

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	6.39 1.75	534 1 33	81.1°	60.2°	
1.0	12.77 3.49	133 0 8	81.1°	60.2°	
1.5	19.16 5.24	59 0 4	81.1°	60.2°	
2.0	25.54 6.98	33 0 2	81.1°	60.2°	
2.5	31.93 8.73	21 0 1	81.1°	60.2°	
3.0	38.32 10.48	15 0 1	81.1°	60.2°	

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 120.4°)  
— C90/C270 (Half-peak divergence: 162.2°)