


# Box\_W1



220-240 V | topLED 41 W 700 mA | CRI 90  
8777N

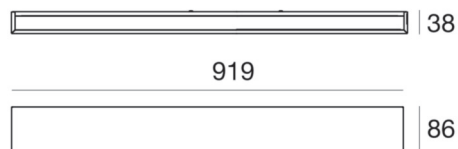

Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	upward
Power	41 W
Luminous flux (source)	5595 lm
Frequency	60 - 50 Hz
CCT / Tonaltà	4000 K
Colour rendering index	90 Ra
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	No
CE	No
ETL	No
Driver included	Yes
Dimmable article	Phase cut
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1,924 Kg

Finishing diffuser	
Material	PMMA
Colour	opaline

Finishing mounting frame	
Material	Iron
Colour	Beton dark grey
Processing	Coating



220-240 V | topLED 41 W 700 mA | CRI 90  
**8777N**

Single emission wall lights for indoor application. The natural white LED light source with a general lighting light distribution is composed of 108 topped LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 5595 lm, with a 136.5 lm/W nominal luminous efficacy and an operating lifetime (L70) of 72.5000 hours.

The diffuser is made of pmma; the mounting frame is made of iron, with a beton dark grey finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1,924 kg. The power supply driver is included in the delivery.


The total absorbed power is 41 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Luminous flux (source)	5595 lm
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Life / Failure ratio	L70C0B20 72.5H



Box\_W1 | Wall Lights | Accessories  
8777N



Dimmer  
PUSH DIM, 220-240V

**Code**  
KIT0026