



Product code	Colour
747-469-16	Black, on demand
747-469-52	Silver, on demand
747-469-21	Mat white, on demand

General Specifications

Product type	: Spotlights
Mounting type	: DKM dimmable track
Description	: Spotlight for dimmable tracks DKM with proper adapter, specially developed for high efficiency COB LEDs. It is equipped with a DALI driver. It can rotate up to 350° with respect to the vertical and to the horizontal axis. Professional optics to get different beam angles and optical devices for a better visual comfort are available as accessories.
Indoor/outdoor lights	: Indoor
Applications	: Museums, Retail, Shopping centres, Showrooms

Lighting specifications

Average lamp life (h)	: 50.000
Lamp description	: LED 4500lm 43W 3000K
Nominal lumens on thermal regime	: 4500
Efficiency L.O.R. (%)	: 89
Delivered lumens (lm)	: 4005
Lamp wattage (W)	: 43
Color temperature (K)	: 3000

Physical Specifications

Body	: Die-cast aluminium
Finishes	: Polyester painted
Reflector	: Mirror-metallized thermoplastic material
Thermal Dissipation	: Passive

Electrical Specifications

Glow wire (°C)	: 850
Driver	: Included
Driver mounting	: Integrated
Voltage (V)	: 220/240
Frequency (Hz)	: 50/60



Weight and Dimensions

Shape	: Cylindrical
Length (mm)	: 150
Height (mm)	: 205
Weight (Kg)	: 1.8


Optical Specifications


Light distribution	: Symmetric
Light emission	: Direct
Light beam	: 30°
Horizontal orientation	: 350°
Note	: Honeycomb code 28-3959-30, pink tempered glass for food applications code 28-3958-58, closing screen cod. 28-3958-58 to be used only together with snoot code 28-3957-30. 17°, 55° (mirror metallized), 70° (white) optics are available on demand.

Unified Glare Rating (U.G.R.)	: <19
-------------------------------	-------



Accessories

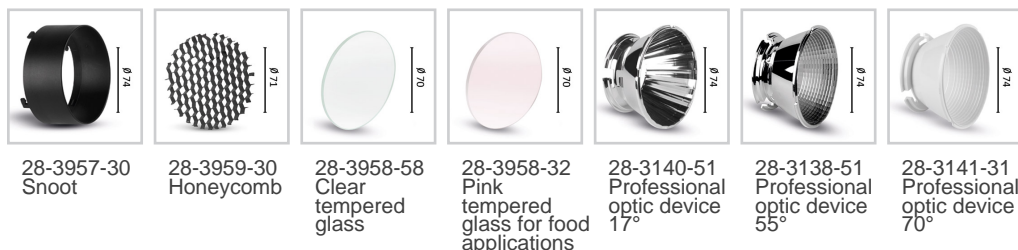

Lamps	Lamp categories	Lamp type	Lamp wattage (W)	Nominal lumens on thermal regime (lm)	Color rendering (CRI)
	LED	COB LED	43	4500	90

Pictures and Applications

