

# PRODUCT DATASHEET

## PPRO AR111 75 40° DIM 11.5 W/2700K G53

PARATHOM PRO LEDspot 111 | LED reflector lamps AR111 with retrofit pin base



---

### AREAS OF APPLICATION

- Shops
- Shop windows
- Hotels, hospitality
- Museums, art galleries
- Exhibition rooms
- Residential interiors
- Luxurious living areas
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- Short payback period thanks to low energy consumption and maintenance costs
- Premium light quality thanks to high color rendering index and narrow binning
- Easy replacement of halogen lamps due to compact design and single optic design

---

### PRODUCT FEATURES

- Professional LED alternative to AR111 halogen lamps
- Very high color rendering ( $R_a: 90$ )
- Mercury-free lamps
- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Single optic design



**TECHNICAL DATA**

## Electrical data

<b>Rated wattage</b>	11.50 W
<b>Nominal wattage</b>	11.50 W
<b>Nominal voltage</b>	12 V
<b>Claimed equiv. conventional lamp power</b>	75 W
<b>Power factor <math>\lambda</math></b>	0.60


## Photometrical data

<b>Luminous intensity [PIM]</b>	1500 cd
<b>Nominal luminous flux</b>	800 lm
<b>Rated luminous flux</b>	800 lm
<b>Rated color temperature</b>	2700 K
<b>Lumen main.fact.at end of nom.life time</b>	0.70
<b>Light color (designation)</b>	Warm White
<b>Color temperature</b>	2700 K
<b>Luminous flux</b>	800 lm
<b>Color rendering index Ra</b>	$\geq 90$
<b>Standard deviation of color matching</b>	$\leq 4$ sdc <sub>m</sub>
<b>Color rendering index Ra</b>	$\geq 90$
<b>Nominal useful luminous flux 90°</b>	800 lm
<b>Rated useful luminous flux 90°</b>	800 lm
<b>Rated peak intensity</b>	1500 cd

## Light technical data

<b>Beam angle</b>	40 °
<b>Warm-up time (60 %)</b>	0.50 s
<b>Starting time</b>	0.5 s
<b>Nominal beam angle</b>	40 °
<b>Rated beam angle (half peak value)</b>	40.00 °

Dimensions & weight

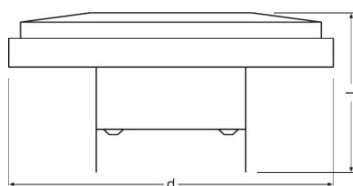

<b>Overall length</b>	54.3 mm
<b>Diameter</b>	111.0 mm
<b>Outer bulb</b>	AR111
<b>Length</b>	54.3 mm
<b>Maximum diameter</b>	110.0 mm

Temperatures & operating conditions

<b>Maximum temperature at tc test point</b>	88 °C
---	-------

Lifespan

<b>Nominal lamp life time</b>	40000 h
<b>Rated lamp life time</b>	40000 h
<b>Number of switching cycles</b>	100000

Additional product data

<b>Base (standard designation)</b>	G53
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

<b>Dimmable</b>	Yes
-----------------	-----

Certificates & standards


<b>Energy efficiency class</b>	A
--------------------------------	---

<b>Energy consumption</b>	12 kWh/1000h
---------------------------	--------------

Country-specific categorizations

<b>ILCOS</b>	DRR-11,5/927-12-G53-111/40
<b>Order reference</b>	LPAR111 7540 11

Light Distribution

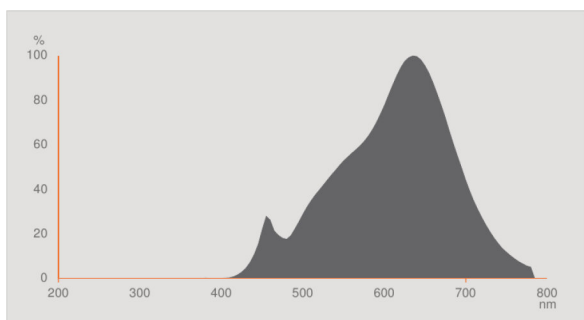

Spectral power distribution

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075017962	Folding carton box 1	86 mm x 86 mm x 112 mm	226.00 g	0.83 dm <sup>3</sup>
4058075017979	Shipping carton box 6	275 mm x 185 mm x 130 mm	1451.00 g	6.61 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**REFERENCES / LINKS**

For dimming conformity see

- ▶ [www.ledvance.com/dim](http://www.ledvance.com/dim)

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

For further products and actual information concerning LED lamps see

- ▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

Further information see

- ▶ [www.ledvance.com/low-voltage-ledlamps](http://www.ledvance.com/low-voltage-ledlamps)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.