




| CRI 80  
90348

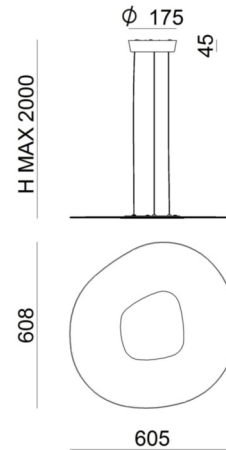

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	38 W
Source lumens	4362 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	Glass
Colour	transparent
Processing	Sandblasting



| CRI 80  
**90348**

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 48 stripled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 4362 lm, with a 114.8 lm/W nominal luminous efficacy.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of glass with a sandblasting treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20;

The total absorbed power is 38 W.

The device features protection class I and can be ceiling-mounted.

<b>Illuminotechnical Features</b>	
Light Output Ratio (LOR)	67 %
Source lumens	4362 lm
Delivered lumens	2945 lm
Consumption	38 W
Luminaire efficacy	77 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
<b>LED Life / Failure Ratio</b>	
L70 B20 C0 72.5h	
<b>UGR</b>	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16
<b>OPTICAL</b>	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°