




Wall Lights | 220-240 V | topLED 13 W 500 mA | CRI 90
7486



Technical data	
Designer	Linea Light
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	upward
Power	13 W
Luminous flux (source)	1680 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.065 Kg

Finishing diffuser	
Material	PMMA
Colour	white
Processing	Satin finishing

Wall Lights | 220-240 V | topLED 13 W 500 mA | CRI 90
7486

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 48 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1680 lm, with a 129.2 lm/W nominal luminous efficacy.

The diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1.065 kg.

The total absorbed power is 13 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features

Light Output Ratio (LOR)	48 %
Luminous flux (source)	1680 lm
Luminaire luminous flux	813 lm
Consumption	13 W
Luminaire efficacy	62 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

Life / Failure Ratio


L80 B20 C0 80000h

UGR

X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 19

OPTICAL

Light distribution simmetry	Asymmetrical
Ottica C0/C180	93°
Ottica C90/C270	79°

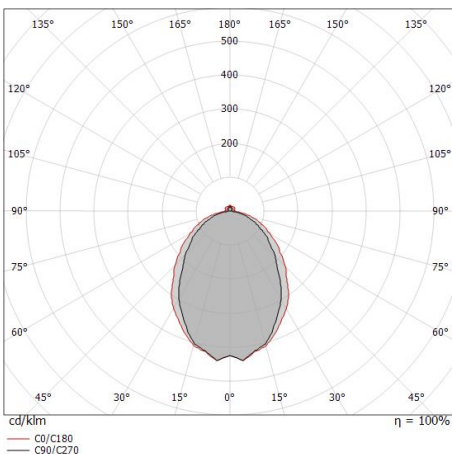

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	0.82 1.05	1383	329	235
1.0	1.65 2.10	346	82	59
1.5	2.47 3.15	154	37	26
2.0	3.30 4.20	86	21	15
2.5	4.12 5.25	55	13	9
3.0	4.95 6.30	38	9	7

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 92.8°)
— C90/C270 (Half-peak divergence: 79.0°)