

PRODUCT DATASHEET QTP-OPTIMAL 2X54...58

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable



AREAS OF APPLICATION

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

PRODUCT BENEFITS

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

PRODUCT FEATURES

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: up to 100,000 h (temperature at $T_c = 65$ °C, max. 10 % failure rate)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

TECHNICAL DATA

Electrical data


| | |
|---|------------------|
| Input voltage AC | 198...264 V |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Input voltage DC | 176...276 V |
| Operating frequency | 40...50 kHz |
| Max. ECG no. on circuit breaker 10 A (B) | 8 ¹⁾ |
| Max. ECG no. on circuit breaker 16 A (B) | 13 ¹⁾ |
| Inrush current | 57 A |

¹⁾ Type B

Light technical data

| | |
|----------------------|-------|
| Starting time | 1.5 s |
|----------------------|-------|

Dimensions & weight



| | |
|--------------------------------------|----------|
| Length | 360.0 mm |
| Width | 30.0 mm |
| Height | 21.0 mm |
| Mounting hole spacing, length | 350.0 mm |
| Product weight | 239.90 g |

Temperatures & operating conditions

| | |
|---|--------------|
| Ambient temperature range | -20...+50 °C |
| Permitted rel. humidity during operation | 5...85 % |

Lifespan

| | |
|---------------------|------------------------|
| ECG lifetime | 100000 h ¹⁾ |
|---------------------|------------------------|

¹⁾ At $T_{case} = 65^\circ\text{C}$ at T_c point / 10% failure rate

Expected Lifetime

| Product name | Lamp group | | | | |
|--------------------------|--------------|------------------------------|--------|--------|-------|
| QTP-OPTIMAL 2X54...58 | DULUX L 55 W | ECG ambient temperature [ta] | 40 | 50 | 60 |
| | | Temperature at tc-point [°C] | 55 | 65 | 75 |
| | | Lifetime [h] | 100000 | 100000 | 60000 |
| | HO 54 W | ECG ambient temperature [ta] | 40 | 50 | 60 |
| | | Temperature at tc-point [°C] | 60 | 65 | 75 |
| | | Lifetime [h] | 100000 | 90000 | 50000 |
| | L 58 W | ECG ambient temperature [ta] | 40 | 50 | 60 |
| | | Temperature at tc-point [°C] | 55 | 65 | 75 |
| | | Lifetime [h] | 100000 | 100000 | 60000 |


Capabilities

| | |
|---|---------|
| Suitable for fixtures with prot. class | I / II |
| End of lamp life safety shutdown | EOL T.2 |

Certificates & standards





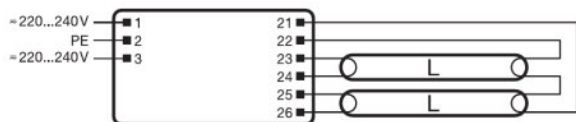






| | |
|----------------------------------|--|
| Approval marks – approval | EL / VDE / ENEC 10 / VDE-EMC |
| EEI – Energy Label | A2 BAT |
| Standards | Acc. to IEC 61347-2-3 / App. J/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to EN 61000-3-2/Acc. to EN 61547 |
| Protection class | I/II |

Wiring Diagram



Wiring diagram

DOWNLOAD DATA

| File | |
|---|--|
|  | Addon Technical Information 502689_Frequent switching Quicktronic |
|  | Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM |
|  | Product Family Datasheet 346489_Familiendatenblatt QTP-Optimal |
|  | Certificates 554891_EAC PT family |
|  | Certificates 349650_QTP-OPTIMAL VDE Certificate |
|  | Certificates 346505_ENEC QTP-Optimal |
|  | Certificates 346506_EMCC QTP-Optimal |
|  | Certificates 346512_CE QTP-Optimal |
|  | Declarations of conformity 339525_Declaration of Conformity (GB) |
|  | Operating instructions 590771_EAC QTP-OPTIMAL |
|  | Operating instructions 590771_EAC QTP-OPTIMAL |

LOGISTICAL DATA

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|-----------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4008321880253 | QTP-OPTIMAL 2X54...58 | Shipping carton box 20 | 385 mm x 160 mm x 100 mm | 6.16 dm ³ | 5016.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable

| Product name | Lamp group | Nominal current | Nominal wattage + Power loss | Luminous flux at 35 °C | Number of lighting outlets |
|-----------------------|-----------------------|-----------------|------------------------------|------------------------|----------------------------|
| QTP-OPTIMAL 2X54...58 | DULUX L 55 W | 0.48 A | 110.00 W | 4800 lm | 2 |
| | DULUX L 55 W CONSTANT | 0.48 A | 110.00 W | 4800 lm | 2 |
| | DULUX L 55 W XT | 0.48 A | 110.00 W | 4800 lm | 2 |
| | HO 50 W ES | 0.46 A | 107.00 W | 4450 lm | 2 |
| | HO 54 W | 0.52 A | 120.00 W | 4450 lm | 2 |
| | HO 54 W CONSTANT | 0.52 A | 120.00 W | 4450 lm | 2 |
| | HO 54 W XT | 0.52 A | 120.00 W | 4450 lm | 2 |
| | L 58 W | 0.49 A | 112.00 W | 5000 lm | 2 |
| | L 58 W XT | 0.49 A | 112.00 W | 5000 lm | 2 |
| | L 58 W XXT | 0.49 A | 112.00 W | 5000 lm | 2 |